



Cultivation of oleaginous *Rhodotorula mucilaginosa* in airlift bioreactor by using seawater

Hong-Wei Yen,* Yu-Ting Liao, and Yi Xian Liu

Department of Chemical and Materials Engineering, Tunghai University, 181 Taiwan Harbor 3rd Rd., Taichung 407, Taiwan

Received 29 April 2015; accepted 16 June 2015

Available online 28 August 2015

The enormous water resource consumption is a concern to the scale-up fermentation process, especially for those cheap fermentation commodities, such as microbial oils as the feedstock for biodiesel production. The direct cultivation of oleaginous *Rhodotorula mucilaginosa* in a 5-L airlift bioreactor using seawater instead of pure water led to a slightly lower biomass being achieved, at 17.2 compared to 18.1 g/L, respectively. Nevertheless, a higher lipid content of $65 \pm 5\%$ was measured in the batch using seawater as compared to the pure water batch. Both the salinity and osmotic pressure decreased as the cultivation time increased in the seawater batch, and these effects may contribute to the high tolerance for salinity. No effects were observed for the seawater on the fatty acid profiles. The major components for both batches using seawater and pure water were C16:0 (palmitic acid), C18:1 (oleic acid) and C18:2 (linoleic acid), which together accounted for over 85% of total lipids. The results of this study indicated that seawater could be a suitable option for scaling up the growth of oleaginous *R. mucilaginosa*, especially from the perspective of water resource utilization.

© 2015, The Society for Biotechnology, Japan. All rights reserved.

[Key words: Microbial oils; Oleaginous; Airlift bioreactors; Seawater; Salinity]

The rapid deterioration of the environment resulting from the over-consumption of fossil fuels makes the use of bioenergy increasingly attractive. Biodiesel is one such option, and can be produced through the transesterification of several oil-containing feedstocks, such as conventional oil crops, waste kitchen oils and microbial oils. Among all potential feedstocks, microbial oils from oleaginous microorganisms are especially attractive, as they can avoid the problem of competition with arable land use while using non-food carbon sources for the accumulation of microbial oils. Oleaginous microorganisms are defined as those species containing more than 20% of lipid content per dry biomass (1). Numerous oleaginous yeasts and microalgae have been reported to be capable of accumulating large amounts of lipids, with some studies reporting a lipid content of more than 70% (2). The majority of these lipids are triacylglycerol (TAG) containing long-chain fatty acids, and the fatty acid profiles of most oleaginous microorganisms are comparable to those of conventional oil crops, and are suitable for use as the feedstock for biodiesel production. More specifically, *Rhodotorula mucilaginosa* is especially suitable for microbial oil production, due to its characteristics of rapid growth and high lipid content by using various carbon sources (3,4).

R. mucilaginosa can accumulate a large amount of lipids from the hydrolysate of cassava starch, with a lipid content of about 48% (w/w) obtained during batch cultivation, and 53% in the fed-batch cultivation (3). The resulting fatty acids are mainly composed of palmitic acid (C16:0), palmitoleic acid (C16:1), stearic acid (C18:0),

oleic acid (C18:1) and linolenic acid (C18:2), suggesting that the fatty acids of *R. mucilaginosa* could be a good feedstock for biodiesel production (3). When the hydrolysate of inulin is used, a lipid content of about 48.8% of can be accumulated in *R. mucilaginosa*, reaching 14.8 g/L of biomass during batch cultivation. Lipid contents of 48.6% and 52.2% have been reported in the batch and fed-batch operations using the hydrolysate extracted from Jerusalem artichoke tubers, respectively, with a biomass of 14.4 g/L and 19.5 g/L. Over 87.6% of the fatty acids from *R. mucilaginosa* cultivated in the hydrolysate extracted from Jerusalem artichoke tubers is C16:0, C18:1 and C18:2, with the major component being C18:1, accounting for 54.7% of the total fatty acids (4). In addition to the high accumulated lipid content, *R. mucilaginosa* is also known to be a good carotene producer. As *R. mucilaginosa* is an obligate aerobe, it is necessary to provide enough dissolved oxygen for its growth. In addition to the biomass, the total carotenoids concentration and production yield are significantly enhanced when the aeration rate is increased to 2.4 vvm (5). Moreover, an initial ammonium sulphate concentration of 2 g/L gives the maximum carotenoids production, with the highest concentration of 89.0 mg total carotenoids per liter of fermentation broth (5).

R. mucilaginosa was reported to have a salinity tolerance as high as 7% of NaCl, although several biological activities (such as the bioreduction function of some chemicals) and the growth rate are reduced at this level (6,7). While the reasons for this tolerance are not clearly understood, a common explanation is the formation of intracellular glycerol under high osmotic conditions, which can be helpful to the process of osmoregulation (8,9). Successful biotechnological processes for producing biodiesel feedstock should be supported by the utilization of cheap substrates, as this would

* Corresponding author. Tel.: +886 4 23590262x209; fax: +886 4 23590009.
E-mail address: hwyen@thu.edu.tw (H.-W. Yen).

make the commercialization of single cell oil (SCO) possible; and for this reason, crude glycerol is a particularly appealing material. About 10% (w/w) of crude glycerol is produced in the biodiesel manufacturing process as the main by-product (10). Since the global production of biodiesel is increasing, the amount of crude glycerol production has also risen significantly, and consequently its market price has fallen, leading to crude glycerol being a very promising potential substrate for the cultivation of oleaginous microorganisms (11, 12).

The large amount of water needed in the fermentation process remains a problem with regard to scaling up operations, as this also yields the argument of water resource arrangement. One way to avoid using water from aquifers is to directly use seawater for the fermentation (13), and this could also reduce the related process costs. Consequently, the present study investigated the effects of salinity on the growth of oleaginous *R. mucilaginosa* by adding various amounts of NaCl and using combinations of seawater and pure water at different ratios. Furthermore, the growth of *R. mucilaginosa* in a 5-L airlift bioreactor using crude glycerol as the sole carbon source will be carried out using seawater and pure water, respectively, and the results then compared.

MATERIALS AND METHODS

Microorganism and medium Freeze-dried *R. mucilaginosa* was provided by Professor Nelson Chang's lab (National Formosa University, Taiwan), and this had been mutated for high lipid content strain screening using NTG mutation method. The seed medium composition was consisting of (per liter): 60 g of crude glycerol, 2 g of yeast extract, 2 g of $(\text{NH}_4)_2\text{SO}_4$, 1 g of KH_2PO_4 , 0.5 g of $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$, 0.1 g of CaCl_2 and 0.1 g of NaCl (14). Solutions of 1.0 N NaOH or 1.0 N HCl were used to adjust the initial pH to 5.5. The crude glycerol was provided by a local biodiesel manufacturing company of Taichung, Taiwan (Yeow-Hwa Biodiesel Company), as it is the by-product of the conventional base catalyst transesterification process. The composition of the crude glycerol was $47 \pm 8\%$ (w/w) of glycerol, $16 \pm 8\%$ methanol and $29 \pm 6\%$ of ash. The actual content of crude glycerol greatly depends on the biodiesel production batch. Seawater was collected from the seashore close to Taichung, Taiwan. Salinity and osmolality of pure seawater are about 31 ± 0.8 g/L and 885 ± 37 mmol/kg. No any pretreatments of the seawater were performed before it was adopted for the medium preparation.

Fermentation in 5-L airlift bioreactor Batch fermentation was carried out in a 5-L internal-loop glass airlift bioreactor (30 cm in height, with a 10 cm outer diameter and 7.7 cm inner tube diameter) with a working volume of 3 L. All experiments were controlled at 24°C , and the pH was controlled at 5.5 by using 1 N NaOH solution. The aeration rate was set at 1.5 vvm to enhance cell growth (15). No agitation device is mounted for this airlift bioreactor. The mixing effects was completely provided by the air flow at the aeration rate of 1.5 vvm.

Analytical methods An infrared balance (IR 35, Denver Instrument) was used to rapidly measure the biomass concentration. Broth (5 ml) was centrifuged at 7000 rpm for 10 min. After removing the supernatant, about an equal volume of distilled water was added to eliminate impurities. This washing procedure was performed several times, and the final liquor was dried using the infrared balance at 150°C to evaporate the water content.

The total lipid analysis was based on a modification of the procedure used by Bligh and Dyer (16). The dry biomass was first ground into a fine powder, and then 0.05 g of the powder was blended with 5 ml chloroform/methanol (2:1), and subsequently agitated for 20 min at room temperature in an orbital shaker. The solvent phase was recovered by centrifugation at 7000 rpm for 10 min. The same process was repeated twice, and the whole solvent was evaporated and dried under vacuum conditions.

The glycerol concentration was measured by HPLC (Agilent series 1100, Agilent Technologies, Santa Clara, CA, USA) with a refractive index detector, while the analysis was performed in a C-18 column (Vercopak N50DS, 250 mm \times 4.6 mm, Vercotech, Taiwan). The mobile phase was composed of 0.01 N H_2SO_4 with a flow rate of 0.4 ml/min (17).

The osmolality was measured using a vapour osmometer (Vapro 5600, Wescor Company). This instrument measures the dew point temperature depression of a solution in vapour equilibrium in a closed chamber for the calculation of osmolality. The salinity measurement was performed using a handheld refractometer (Master-BX/S28M, Atago).

All shaker conditions were performed in triplicate to have the expression of mean \pm standard deviation. The data of 5-L airlift bioreactor operation will be acquired on three separate time points after the steady-state condition achieved, and the values would be expressed as the mean \pm standard deviation.

RESULTS AND DISCUSSION

Effects of NaCl concentrations in the shaker trials The purpose of this study aimed to explore the feasibility of directly using seawater for the growth of *R. mucilaginosa*. It is well known that the salinity of seawater is about 3.5% of NaCl. Therefore, the effects of initial NaCl concentration (0.1–40 g/L) adding in the pure water on the growth of *R. mucilaginosa* were examined in the shaker flasks using 60 g/L of crude glycerol as the carbon source. The results are shown in Fig. 1, which indicates that high salinity will lead to a decrease in biomass from 8.7 ± 0.6 to 6.9 ± 0.1 g/L for the trials containing 0.1 to 40 g/L of NaCl. Besides the inhibition of cell growth, the lipid content and β -carotene content were also observed to be slightly reduced with the increase of salinity, and these levelled off when the NaCl concentration was over 30 g/L. This is in contrast to an earlier report (18) which indicated that an increase in the osmotic pressure in the medium will lead to an increase in the lipid content and a fall in the polysaccharide content, while the relative proportion of polyols increased, although the qualitative composition of intracellular lipids did not change. In the cultivation of *Rhodotorula rubra*, an increase in the salt concentration to high levels of 4%, 8% and 12% resulted in a decrease in the specific cell growth rate from 0.27 to 0.05 (1/h). Nevertheless, the total lipid content of the cells increased along the salinity, which was not observed in the current study (9). Although the reasons for the tolerance of *Rhodotorula* under conditions of high salinity remain unclear, a close correlation between intracellular glycerol concentration and medium salinity has been observed, suggesting that the formation of glycerol pool concentrations inside the cells may balance the osmotic pressure in highly saline media (9). The intracellular glycerol concentration was not measured in this study. Nevertheless, a high NaCl tolerance of *R. mucilaginosa* growth was concluded in this study. The results obtained by Zheng and his colleagues (7) also showed that *R. mucilaginosa* could tolerate very high salinity, of up to 7% NaCl. Although an increase in the NaCl concentration did not increase the lipid content in the current study, in contrast to the findings in the literature (9), relatively good growth of *R. mucilaginosa* was still obtained at a high NaCl concentration of 40 g/L. Therefore, the next section will examine the effects of adding seawater at various ratios on the growth of *R. mucilaginosa*.

The effects of seawater/pure water ratios on the growth of *R. mucilaginosa* As shown in the previous section, *R. mucilaginosa* has the potential to be cultured in a medium with salinity as high as 40 g/L of NaCl. Nevertheless, the growth rate of biomass was slightly impeding by the increase of NaCl

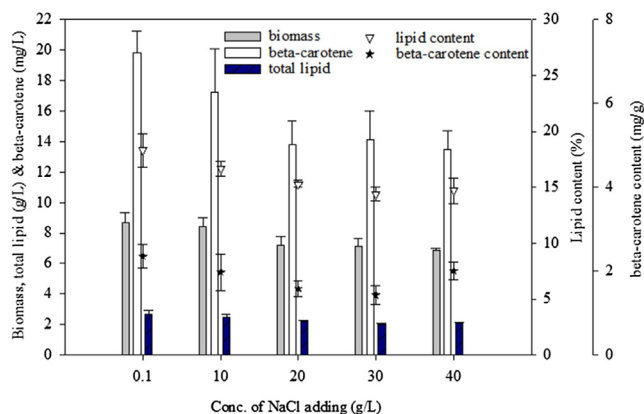


FIG. 1. Effects of adding NaCl on the growth of *R. mucilaginosa* in the shaker trials.

concentration. Therefore, this section thus examined the effects of various ratios of seawater and pure water on the growth rate of *R. mucilaginosa*, with five amounts of seawater in the total solution being investigated: 100%, 75%, 50%, 25% and 0%. The results are shown in Fig. 2, where it can be seen that using 100% sea water will cause the resulting biomass to fall to 6.0 ± 1.2 g/L, as compared to 9.2 ± 0.14 g/L obtained in the batch using pure water (representing as fall of about 36%). Even though this is a significant fall in the amount of biomass, the effects of adding seawater on the lipid content are not clear. The lipid contents obtained in the trials with the various ratios of pure water and seawater were in the range of 25–35%. It is thus suggested that while the high osmotic pressure in the batch grown using pure seawater might inhibit cell growth, it did not alter the lipid accumulation of *R. mucilaginosa*.

Effects of seawater on the growth of *R. mucilaginosa* in a 5-L airlift bioreactor The results reported above indicate that using seawater instead of pure water will inhibit the growth of oleaginous *R. mucilaginosa*. Nevertheless, the benefits of lower medium costs and avoiding the use of limited water resources make the use of seawater an attractive option. The use of seawater in a 5-L airlift bioreactor was thus compared with that of pure water using 60 g/L of crude glycerol as the carbon source (Fig. 3). The related kinetic data are compared in Table 1. The results show that the batch produced with pure water had a higher biomass growth rate than that produced with seawater, at 0.161 compared to 0.142 g/L h. Nevertheless, the maximum biomass obtained from both batches was very similar, at 18.1 and 17.2 g/L for seawater and pure water, respectively. The retarded biomass profile found for the seawater batch indicates that the high initial osmotic pressure of seawater batch will delay the cell growth. It takes longer time to achieve the maximum biomass in the seawater batch. However, the longer growth phase means that more lipids accumulated in the seawater batch, resulting in a higher lipid content of $65 \pm 5\%$, as compared to the $55 \pm 4\%$ obtained in the pure water batch.

So far, it is clear that even though seawater retards the growth of *R. mucilaginosa*, it does not cause a reduction in total lipid accumulation. At present, the reasons why *R. mucilaginosa* can survive in a highly osmotic environment, such as that seen with pure seawater, remain unclear. However, the formation of intracellular glycerol has been suggested as playing a crucial role in the osmoregulation of yeast, which might balance the osmotic pressure on either side of the cell membrane (8). The results shown in Fig. 4 for the pure seawater batch grown in a 5-L airlift bioreactor show a simultaneous decrease in osmolality and salinity as the cultivation time increases. This decrease in salinity might contribute to the

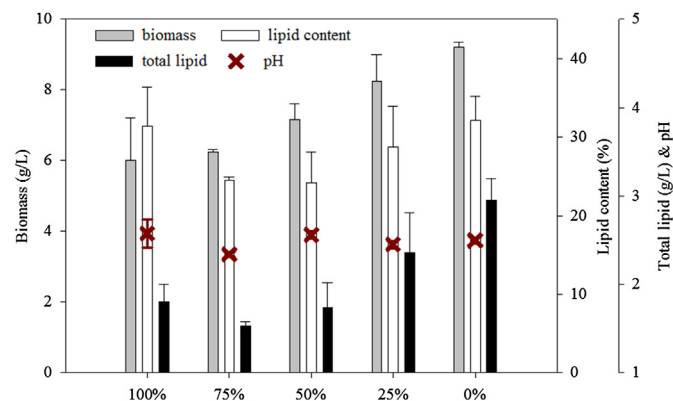


FIG. 2. Effects of adding seawater at various ratios (seawater/pure water) on the growth of *R. mucilaginosa* in the shaker trials.

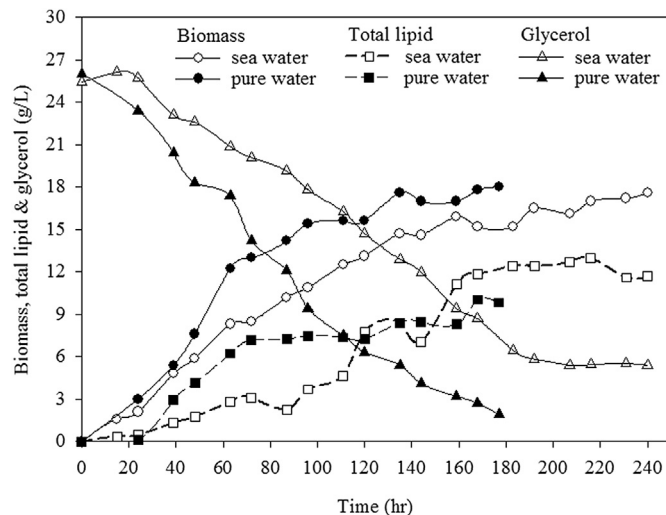


FIG. 3. Comparison of using seawater and pure water in a 5-L airlift bioreactor with 60 g/L of crude glycerol as the carbon source.

TABLE 1. The kinetic parameters comparison between batches using pure water and sea water respectively in a 5-L airlift bioreactor.

	Pure water	Sea water
Max. biomass (g/L)	18.1	17.2
Avg. total lipids (g/L)	10 ± 0.7	12.2 ± 0.8
Avg. lipid content (%)	55 ± 4	65 ± 5
Max. biomass growth rate (g/L h)	0.161	0.132

reduction in osmolality in the seawater batch. This suggests that *R. mucilaginosa* should be able to directly utilize NaCl to reduce the salinity of medium, in addition to the effects of the formation of intracellular glycerol with regard to osmoregulation. Furthermore, the effects of salinity on the fatty acid profiles between the batches using pure water and seawater are shown in Table 2. The results indicate that the use of seawater had no significant effects on the fatty acid distribution. The major components of this were C16:0 (palmitic acid), C18:1 (oleic acid) and C18:2 (linoleic acid), which together accounted for over 85% of total lipids. The percentage of the most unstable component of C18:3 (methyl linolenate) was not affected by the type of water used during the cultivation (19). The results of this study thus show that seawater has good potential for

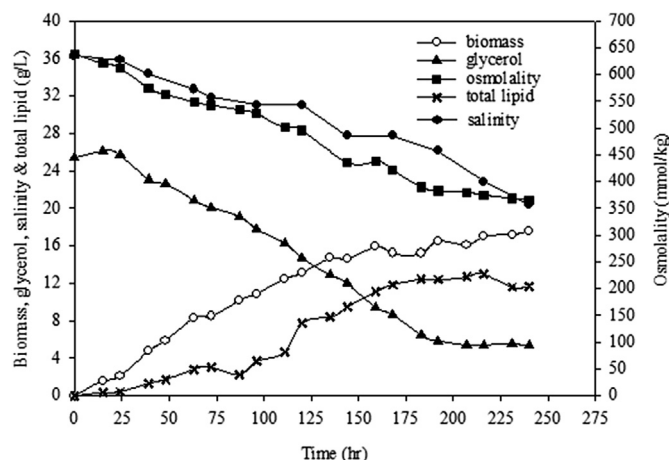


FIG. 4. The time course of using seawater in a 5-L airlift bioreactor with 60 g/L of crude glycerol for the growth of *R. mucilaginosa*.

TABLE 2. The fatty acid profiles between the batches using pure water and seawater in a 5-L airlift bioreactor.

Fatty acid component	Pure water (%)	Seawater (%)
C15:0	3.1	3.4
C16:0	19.6	20.2
C16:1	0.8	1.2
C18:0	6.1	4.3
C18:1	41.8	42.6
C18:2	27	27
C18:3	1.6	1.5

use in the cultivation of oleaginous *R. mucilaginosa* for total lipid accumulation.

ACKNOWLEDGMENTS

The authors gratefully acknowledge the financial support this study received from Taiwan's Ministry of Science and Technology (MOST) under grant numbers 103-2621-M-029-007 and 103-3113-E-006-006.

References

- Ageitos, J. M., Vallejo, J. A., Veiga-Crespo, P., and Villa, T. G.: Oily yeasts as oleaginous cell factories, *Appl. Microbiol. Biotechnol.*, **90**, 1219–1227 (2011).
- Meng, X., Yang, J., Xu, X., Zhang, L., Nie, Q., and Xian, M.: Biodiesel production from oleaginous microorganisms, *Renew. Energy*, **34**, 1–5 (2009).
- Li, M., Liu, G.-L., Chi, Z., and Chi, Z.-M.: Single cell oil production from hydrolysate of cassava starch by marine-derived yeast *Rhodotorula mucilaginosa* TJY15a, *Biomass Bioenergy*, **34**, 101–107 (2010).
- Zhao, C.-H., Zhang, T., Li, M., and Chi, Z.-M.: Single cell oil production from hydrolysates of inulin and extract of tubers of Jerusalem artichoke by *Rhodotorula mucilaginosa* TJY15a, *Process Biochem.*, **45**, 1121–1126 (2010).
- Aksu, Z. and Eren, A. T.: Carotenoids production by the yeast *Rhodotorula mucilaginosa*: use of agricultural wastes as a carbon source, *Process Biochem.*, **40**, 2985–2991 (2005).
- Chunli, Z., Jiti, Z., Jing, W., and Baocheng, Q.: Isolation and characterization of a nitrobenzene degrading yeast strain from activated sludge, *J. Hazard Mater.*, **160**, 194–199 (2008).
- Zheng, C., Zhou, J., Wang, J., Qu, B., Lu, H., and Zhao, H.: Aerobic degradation of nitrobenzene by immobilization of *Rhodotorula mucilaginosa* in polyurethane foam, *J. Hazard Mater.*, **168**, 298–303 (2009).
- Galafassi, S., Toscano, M., Vigentini, I., Piskur, J., and Compagno, C.: Osmotic stress response in the wine yeast *Dekkera bruxellensis*, *Food Microbiol.*, **36**, 316–319 (2013).
- Hernandezsaavedra, N., Ochoa, J., and Vazquezduhail, R.: Effect of salinity in the growth of the marine yeast *Rhodotorula rubra*, *Microbs*, **80**, 99–106 (1994).
- Yang, F., Hanna, M. A., and Sun, R.: Value-added uses for crude glycerol—a byproduct of biodiesel production, *Biotechnol. Biofuels*, **5**, 13–23 (2012).
- Cutzu, R., Coi, A., Rosso, F., Bardi, L., Ciani, M., Budroni, M., Zara, G., Zara, S., and Mannazzu, I.: From crude glycerol to carotenoids by using a *Rhodotorula glutinis* mutant, *World J. Microbiol. Biotechnol.*, **29**, 1009–1017 (2013).
- Yen, H. W., Yang, Y. C., and Yu, Y. H.: Using crude glycerol and thin stillage for the production of microbial lipids through the cultivation of *Rhodotorula glutinis*, *J. Biosci. Bioeng.*, **114**, 453–456 (2012).
- Sabeela Beevi, U. and Sukumaran, R. K.: Cultivation of the fresh water microalga *Chlorococcum* sp. RAP13 in sea water for producing oil suitable for biodiesel, *J. Appl. Phycol.*, **27**, 141–147 (2015).
- Kim, B. K., Park, P. K., Chae, H. J., and Kim, E. Y.: Effect of phenol on β -carotene content in total carotenoids production in cultivation of *Rhodotorula glutinis*, *Korean J. Chem. Eng.*, **21**, 689–692 (2004).
- Yen, H.-W. and Liu, Y. X.: Application of airlift bioreactor for the cultivation of aerobic oleaginous yeast *Rhodotorula glutinis* with different aeration rates, *J. Biosci. Bioeng.*, **118**, 195–198 (2014).
- Bligh, E. G. and Dyer, W. J.: A rapid method for total lipid extraction and purification, *Can. J. Biochem. Physiol.*, **37**, 911–917 (1959).
- Athalye, S. K., Garcia, R. A., and Wen, Z.: Use of biodiesel-derived crude glycerol for producing eicosapentaenoic acid (EPA) by the fungus *Pythium irregulare*, *J. Agric. Food Chem.*, **57**, 2739–2744 (2009).
- Zalashko, M. V., Salokhina, G. A., and Shamgina, T. V.: Effect of sodium chloride on *Rhodotorula glutinis* metabolism, *Mikrobiologiya*, **53**, 16–20 (1984).
- Knothe, G.: Some aspects of biodiesel oxidative stability, *Fuel Process. Technol.*, **88**, 669–677 (2007).